


## SETUP OF EXISTING MIXIT PRO COMPUTERS

1. Verify that MixIt Pro version 3.5 or above is installed

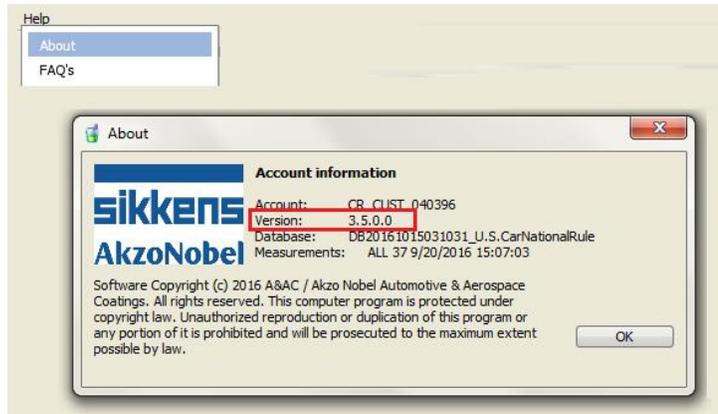

2. Download the StarTech drivers from Customer Service Portal:

United States StarTech Drivers USB31000s 38MB [Download](#)

3. Extract the zip file
4. Open the folder StarTech USB31000S

Name	Date modified	Type
StarTech USB31000S	10/28/2016 9:33 AM	File folder


5. Open the appropriate folder depending on the version of Windows

Windows 7	10/28/2016 9:33 AM	File folder
Windows 8.x & 10	10/28/2016 9:33 AM	File folder
Windows XP & Vista	10/28/2016 9:33 AM	File folder


6. Scroll to the bottom of the folder and run Setup. Wait for the driver installation to complete. **NOTE: Could take several minutes**

Name	Date modified
ISSetup.dll	10/28/2016 9:33 AM
setup.exe	10/28/2016 9:33 AM
Setup.ini	10/28/2016 9:33 AM

7. Open Windows Control Panel

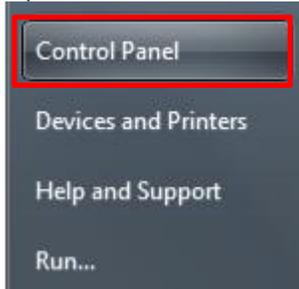


8. Go to [Network and Internet](#), [Network and Sharing Center](#)

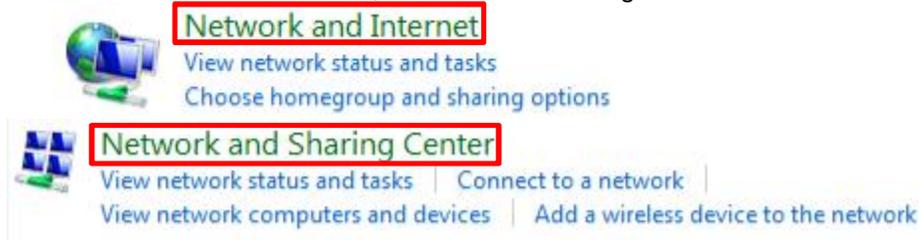


9. Click "Change Adapter Settings"




10. There should be two icons displayed for Local Area Connection. One of them should be named "Local Area Connection 2", listed in the fine print as "ASIX...USB 3.0..." right-click on this one

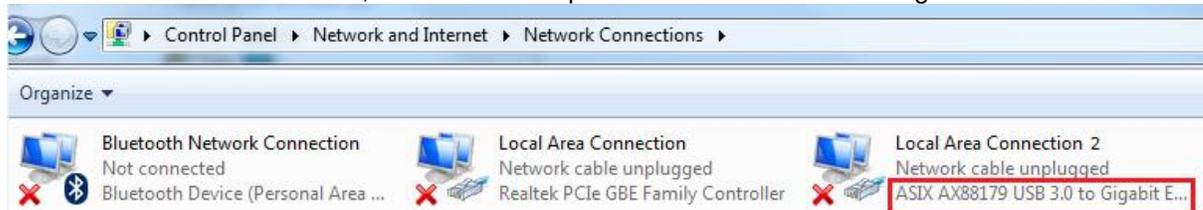

11. Click Properties

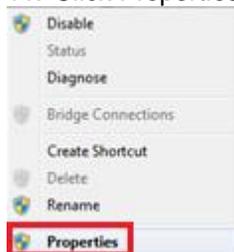


12. On the properties screen, click "Internet Protocol Version 4 (TCP/IPv4) and then click Properties.

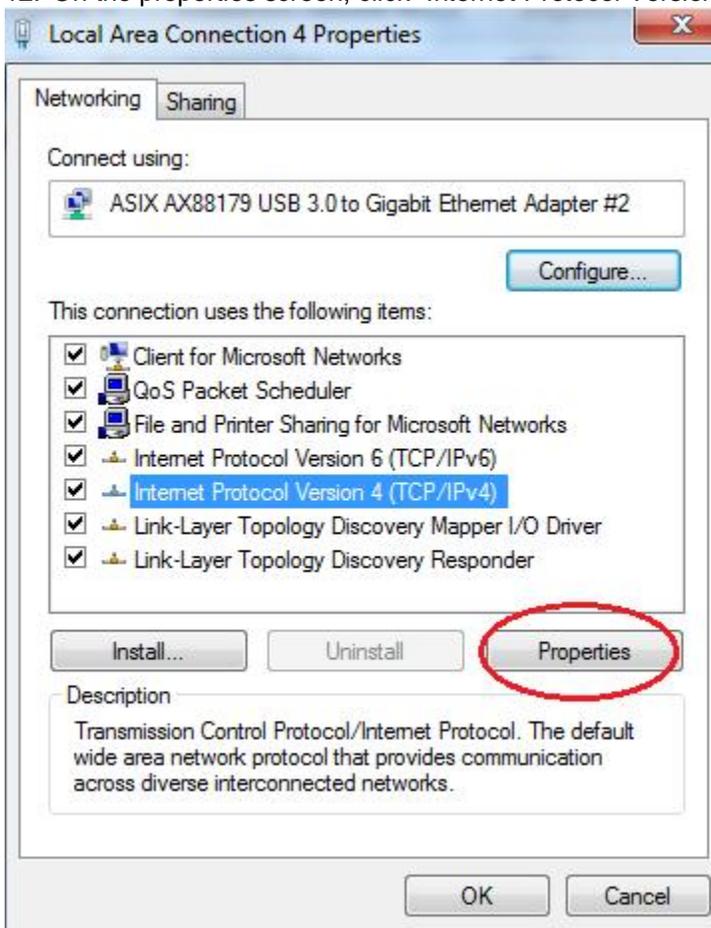

13. Click the radio button “Use the following IP address:”

14. For IP address enter 192.168.140.99

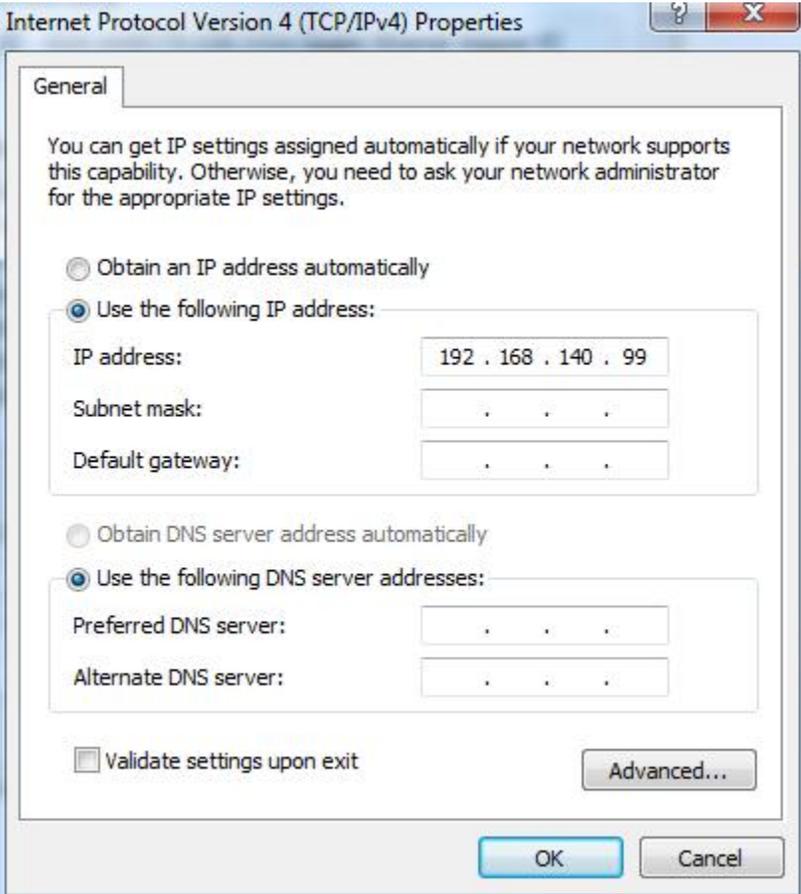

Internet Protocol Version 4 (TCP/IPv4) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

Obtain an IP address automatically

Use the following IP address:

IP address: 192 . 168 . 140 . 99

Subnet mask: . . .

Default gateway: . . .

Obtain DNS server address automatically

Use the following DNS server addresses:

Preferred DNS server: . . .


Alternate DNS server: . . .

Validate settings upon exit

Advanced...

OK Cancel

Click in the box for Subnet mask and it will automatically fill in 255.255.255.0

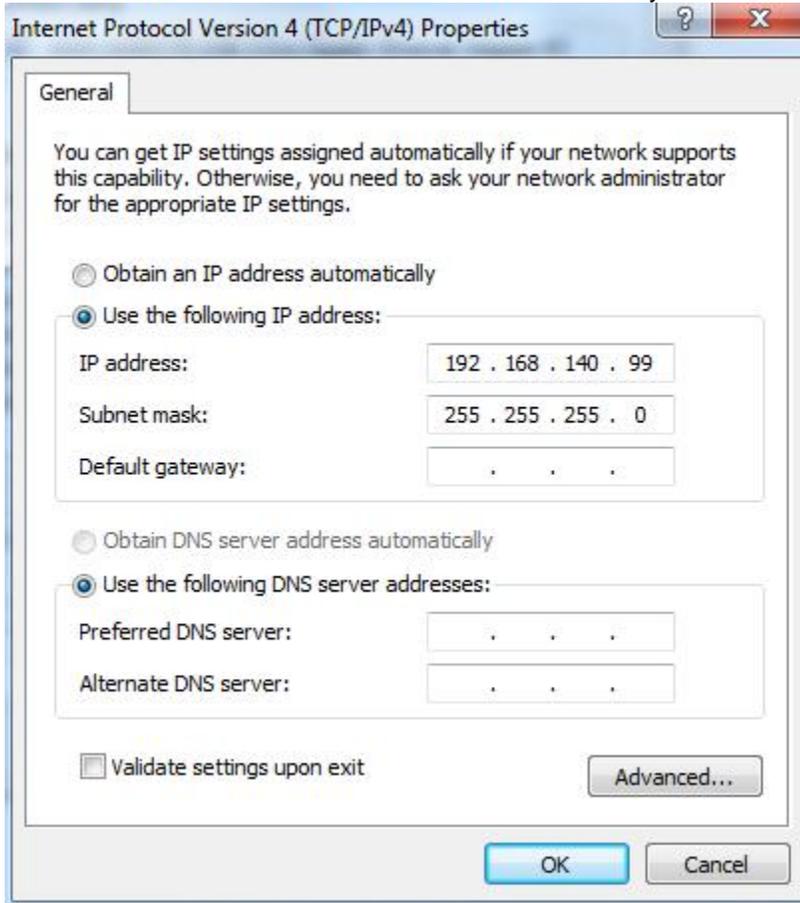

15. Click OK, and close the Control Panel windows

16. Launch MIXIT Pro

17. Go to Tools >> Settings >> Devices



18. Under Mixing Scales, click Add

19. For scale type select Network

20. For location name, enter PMA.Vision (this will also be the name of the mixing queue)

21. For Host Name/IP Address, enter 192.168.140.16

### Select Scale Type

Select the type of scale and the location where the scale will be placed.

Scale Type	Location Name
Network <input type="button" value="v"/>	PMA.Vision
	Host Name/IP Address
	192.168.140.16

Help Cancel Back Next Finish

22. Click Next

23. For Scale Brand select Sartorius

24. For Scale Model select PMA.Vision

Settings > Edit Mixing Scale ⌘

### Specify Network Scale Settings

Connection Port  
192.168.140.16

---


Scale Brand: Sartorius      Scale Model: PMA.Vision

Capacity: 7.5 kg      Precision: 0.1 g

Help   Cancel   Back   Next   Finish

25. Click Finish

26. When you are back on the Devices screen, highlight the PMA.Vision scale then click Test Scale, you should get a message “The scale test was successful”. If the test is not successful, power off PMA.Vision then back on again, then try the connection test again

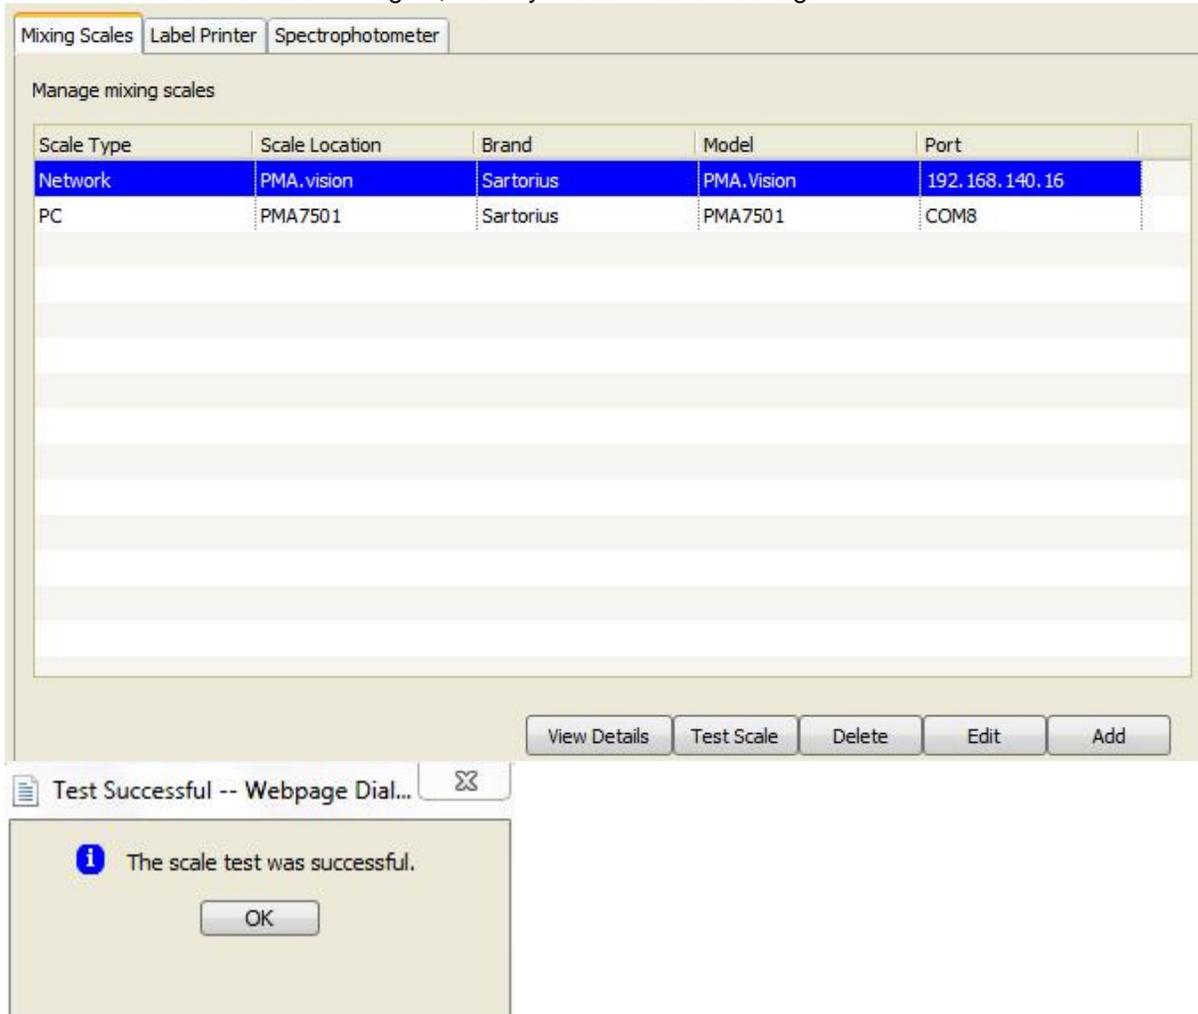

Mixing Scales | Label Printer | Spectrophotometer

Manage mixing scales

Scale Type	Scale Location	Brand	Model	Port
Network	PMA.vision	Sartorius	PMA.Vision	192.168.140.16
PC	PMA7501	Sartorius	PMA7501	COM8

View Details | Test Scale | Delete | Edit | Add

Test Successful -- Webpage Dial... 

**i** The scale test was successful.

OK

27. Click OK to leave the devices screen

You are now ready to start queuing mixes to PMA.Vision